



油浸式配電變壓器特性規格一覽表

Transformer datas

3 Ø 50Hz 22kV/400-231V Dyn11 [50~3000kVA]

Characteristic per Standards:

1094/EVN/DL2-4 / TCVN1984-1994 / IEC60076

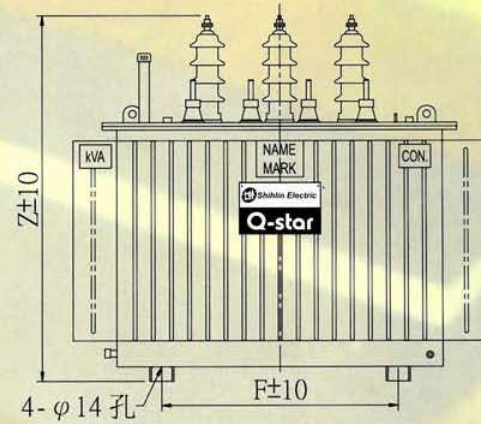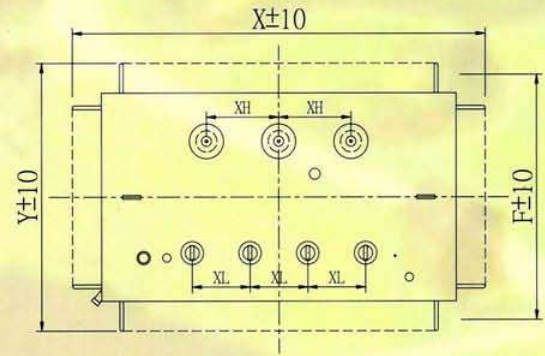

Phase	Rated power kVA	Losses				Noise Level dB	Weights			Dimensions (mm)					
		No-load loss Po(W)	Load loss Pk(W)	Io %	Un %		Oil kg	Tr. Body kg	Total kg	X	Y	Z	F	XL	XH
		3	100	205	1258		2.0	4-6	44	155	390	675	1022	630	1123
	160	280	1940	2.0	4-6	44	195	580	945	1122	790	1193	550	150	300
	180	315	2185	2.0	4-6	44	185	575	930	1062	800	1193	550	150	300
	250	340	2600	2.0	4-6	44	235	775	1235	1172	820	1223	660	150	300
	320	390	3330	2.0	4-6	44	285	850	1370	1242	880	1293	660	150	300
	400	433	3818	2.0	4-6	44	340	1030	1655	1550	950	1293	660	150	300
	560	580	4810	2.0	4-6	44	365	1350	2085	1650	980	1293	660	150	300
	630	787	5570	2.0	4-6	46	405	1210	1990	1680	980	1293	660	150	300
	750	855	6725	1.5	4-6	46	505	1340	2290	1810	1060	1415	820	150	300
	800	880	6920	1.5	4-6	46	550	1605	2630	1860	1110	1415	820	150	300
	1000	980	8550	1.5	4-6	46	690	1790	3020	1990	1110	1515	820	165	300
	1250	1020	10690	1.5	4-6	46	830	2110	3620	2080	1280	1615	820	165	300
	1500	1223	12825	1.0	4-6	48	960	2115	3865	2160	1360	1715	820	165	300
	1600	1305	13680	1.0	4-6	48	1000	2385	4210	2260	1360	1715	820	165	300
	2000	1500	17100	1.0	4-6	48	1205	2730	5000	2500	1500	1815	820	165	300
	2500	2870	21740	1.0	6.0	53	1405	2655	5365	2460	1580	1827	1000	240	300
	3000	3440	27660	1.0	7.0	53	1805	2955	6305	2550	1600	2027	1000	240	300